


FROST COOLING COLD STORAGE DOORS

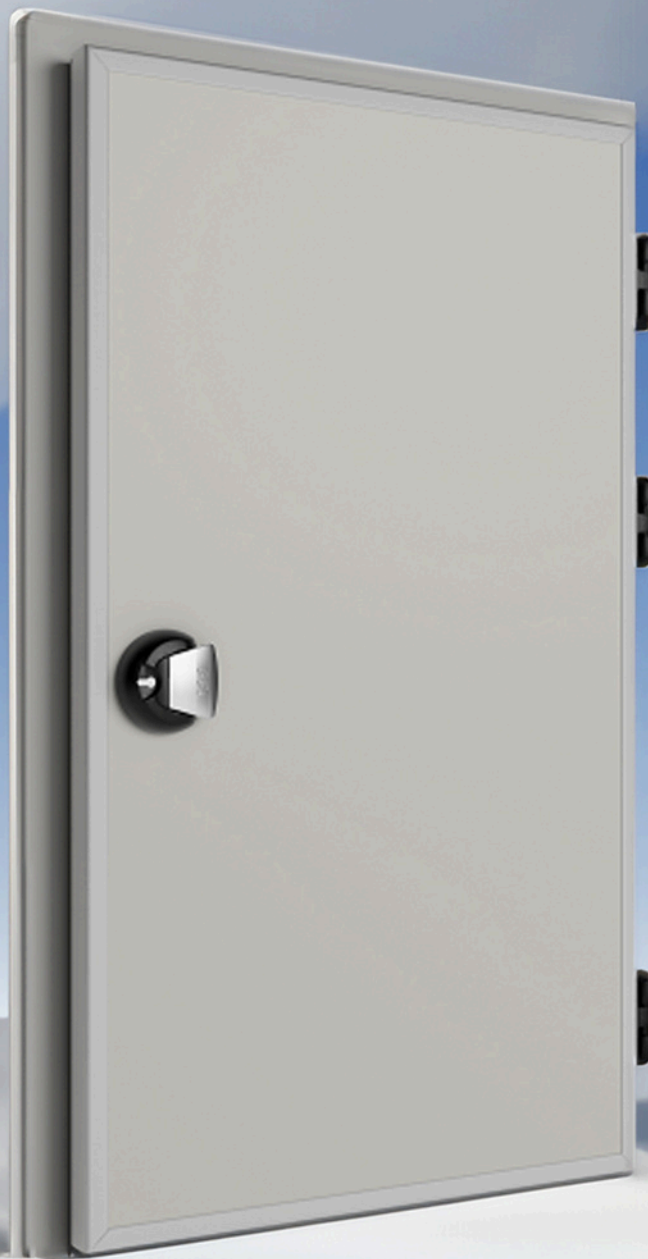

Cold Storage **HINGED DOOR**

Descriptions & Features:

Our **Hinged Door Frames** are crafted from durable aluminum and designed for reinforcement, with integrated sheets inside the frame to accommodate accessories. Freezer room door frames come equipped with a heating cable line inside the aluminum frame. These frames are ideal for environments requiring regular hygienic washing.

The **hinged door blades** come in varying thicknesses and are tailored for both cold rooms (70 and 90mm) and freezer rooms (90, 120, and 150mm). They are constructed as a Monoblock with CFC-free polyurethane foam, providing excellent insulation at 40-43 kg/m³. The anodized aluminum edge profile enhances durability, and reinforcement sheets inside the blade offer strong support for accessories. Cold room doors feature a single line of EPDM gaskets, while freezer doors include a double line (except CBT9), with a heating cable embedded in the freezer door gasket. The door blades are made from 0.5mm PVC-coated galvanized sheet as standard, but are customizable in pre-painted RAL colors or stainless steel, with sheet thicknesses ranging from 0.5 to 1.2mm. These blades are fully compatible with hygienic cleaning processes.

Our **Hinged Door Thresholds** offer a range of options to fit any application. For technical specifications or to explore feasibility options, you can request technical drawings from our team, download our catalog, or contact us directly for more information.




Hinged Door SKU ID and DIMENSIONS

SKU Model : **DH130200R+**

SKU model name key details:

- D** → Door
- H** → Hinged
- 130** → Width
- 200** → Height
- R** → Right Side Opening
- +** → For 0 Degrees (with heating)

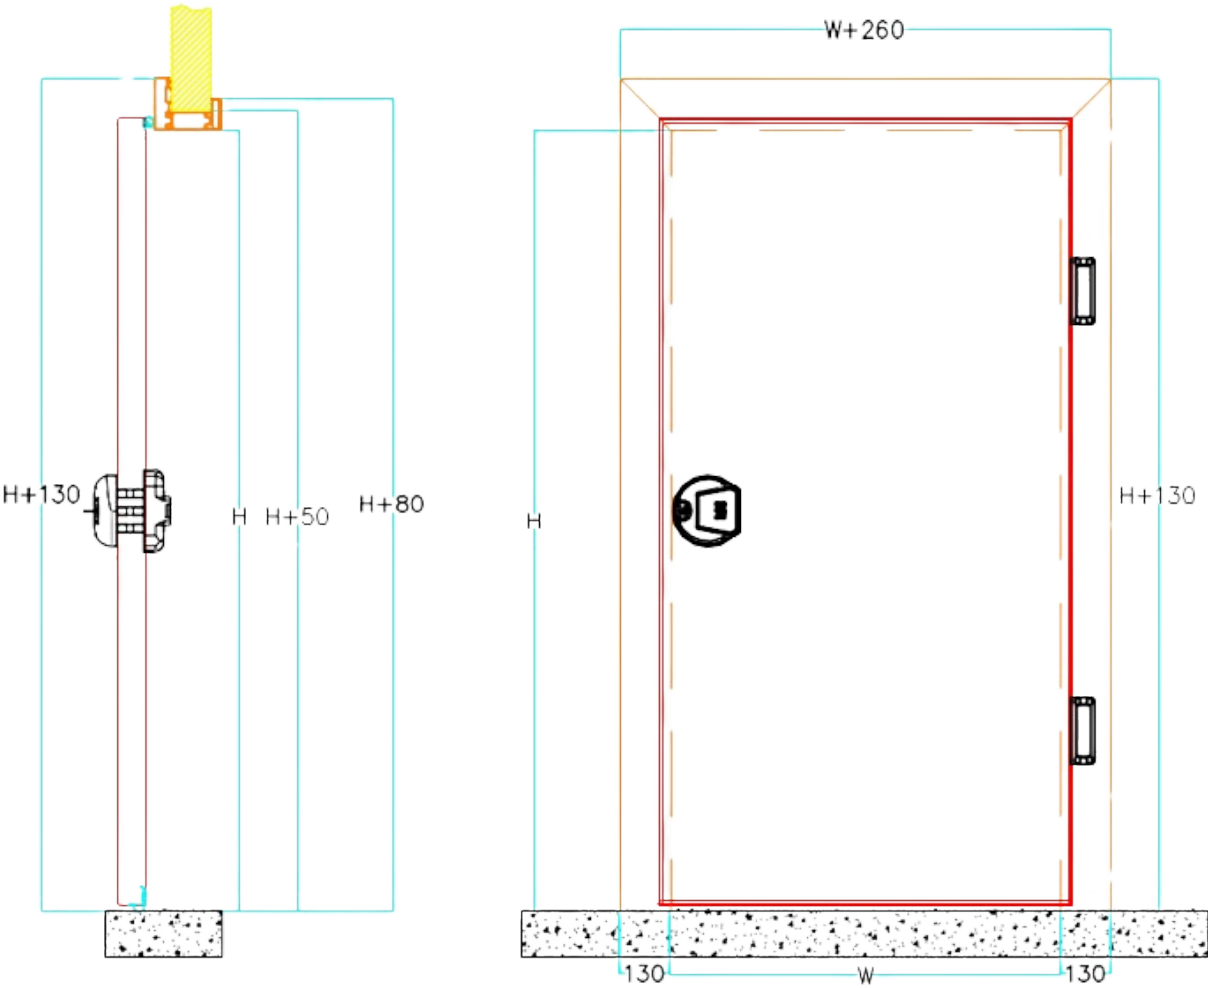


Cold Storage **SLIDING DOOR**

Descriptions & Features:

The **Horizontal Sliding Door Wing** is available in various thicknesses to suit both cold room doors (70, 80, 90, and 100mm) and frozen storage room doors (90, 100, 120, and 150mm). The wings are constructed as Monoblock panels filled with high-density 40-43 kg/m³ CFC-free polyurethane foam for superior insulation. Our Easy Slide series features wings with specially designed profiles for added strength and functionality. All wing frames are made from anodized aluminum, ensuring durability and resistance to corrosion. Reinforcement sheets are embedded inside the wings to support accessories, while a single EPDM gasket is used on cold room doors and a double EPDM gasket on frozen storage doors (except SBT9 and ESBT10). Frozen storage doors also include a heating resistance within the gasket for added insulation. The wings are standardly manufactured with a 0.5mm thick, 130µ PVC-coated galvanized sheet metal, but can also be customized with 25µ RAL-painted or A304 stainless steel options, with sheet thicknesses available from 0.5 to 1.2mm. These sliding door wings are designed to withstand hygienic washing environments.

The **Horizontal Sliding Door Rail** system is made from anodized aluminum, ensuring strength and longevity. Our sliding doors feature a bottom rail system, eliminating the need for floor slides. These rails are also designed for easy maintenance and hygienic washing.



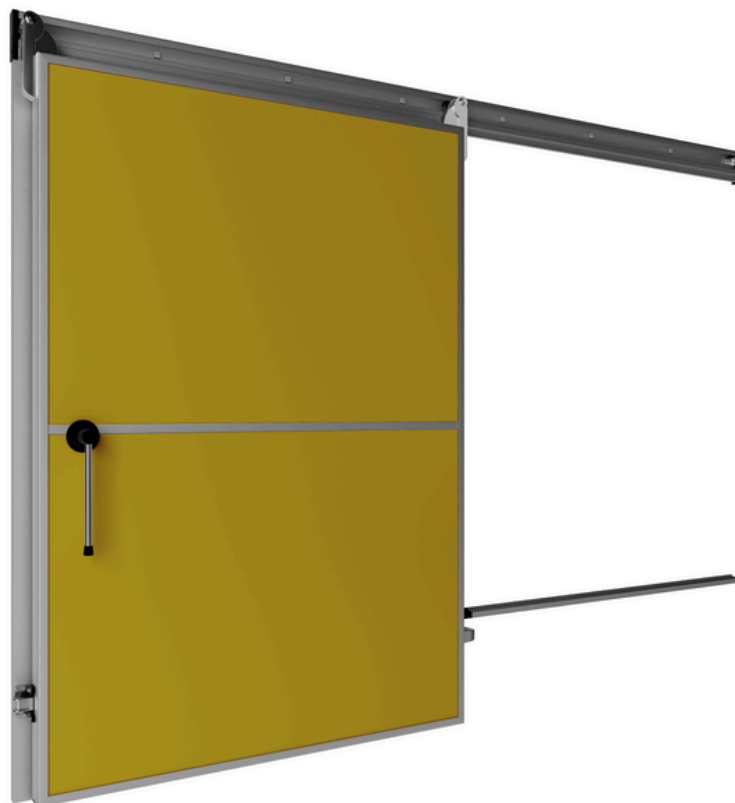


Sliding Door SKU ID and DIMENSIONS



SKU Model : **DS200250L+**

SKU model name key details:

- D** → Door
- S** → Sliding
- 200** → Width
- 250** → Height
- L** → Left Side Opening
- +** → For 0 Degrees (with heating)

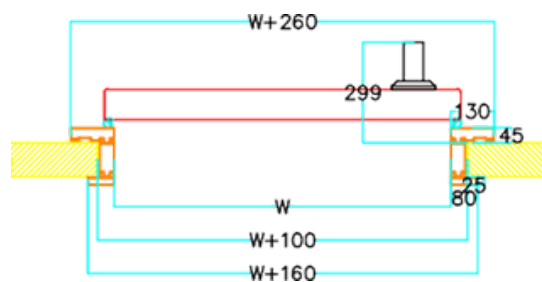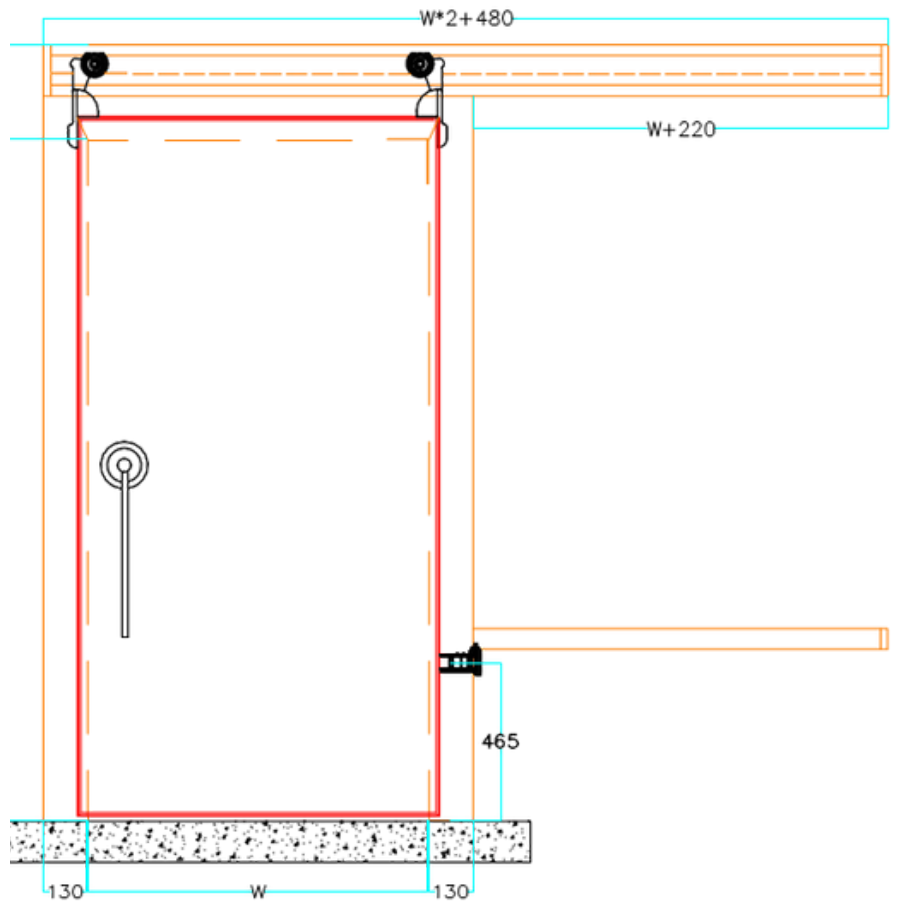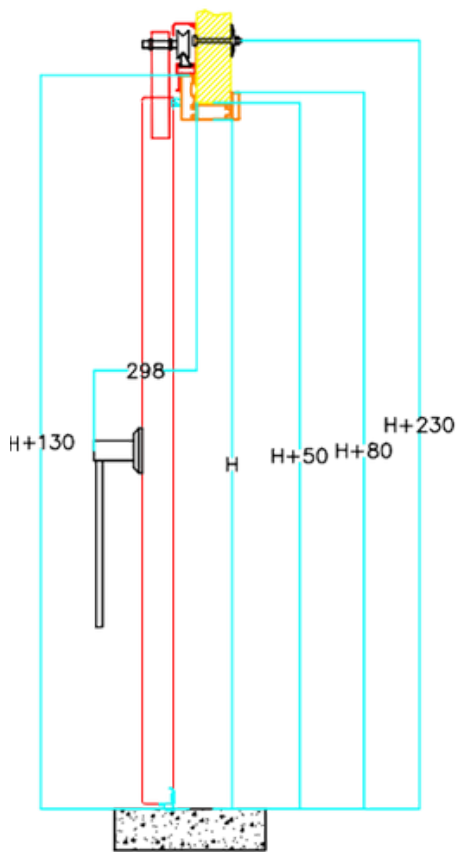

WHERE QUALITY MEETS RELIABILITY

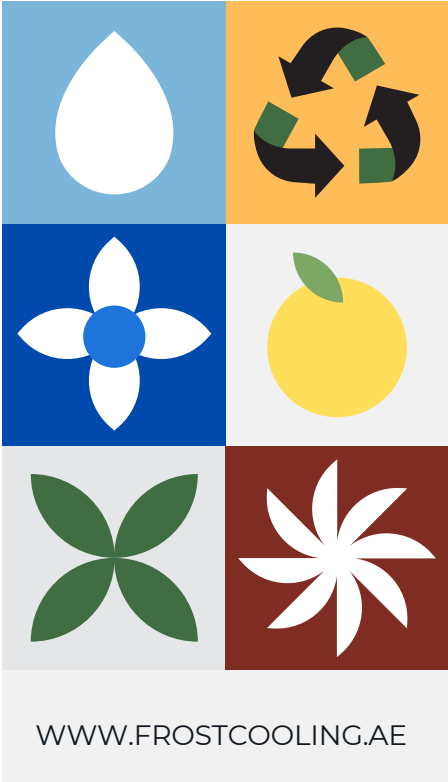

FROST COOLING TRADING
SALES: +971 58 553 8232
OFFICE: +971 58 520 5232
EMAIL: SALES@FROSTCOOLING.AE