



GLINT

VERTICAL MULTI-DECK





Benefits & Specifications:

- User-friendly
- Simplified maintenance
- Easy access and ergonomic design
- Designed for modular configurations
- Large display area
- Easily adapted to retrofit projects

Dimensions (mm):

Height : 2050 / 2200


Length : 1250 / 1875 / 2136 (HC) / 2500 / 2812,5 / 3125 / 3750

Depth : 950 / 1020 / 1120


SYSTEM	OPERATING TEMP. °C	REFRIGERANT
REMOTE	-1 / +1 +2 / +4 +4 / +6	HFC blend HFC/HFO blend CO ₂ GLYCOL/WATER

HFC: R407A / R407F / R134a / R404A • HFC/HFO: R448A / R449A / R452A / R450A
CO₂: R744 • GLYCOL/WATER: R718


ACCESSORIES

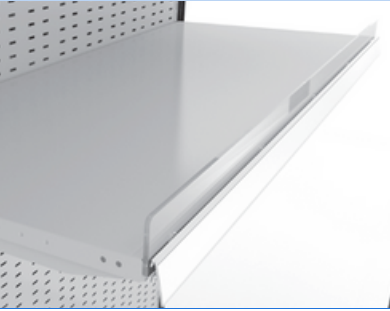


SOLID SHELF

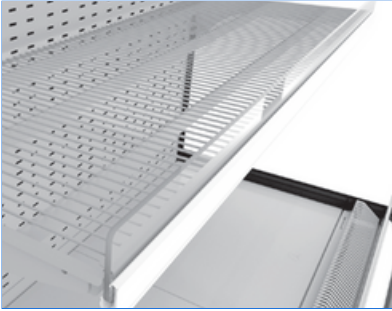

WIRE SHELF

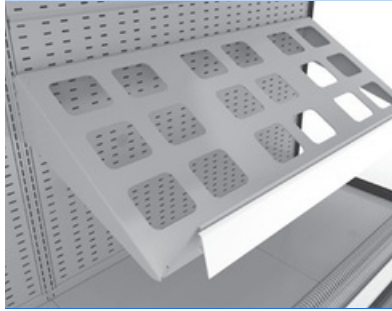


RACK SHELF

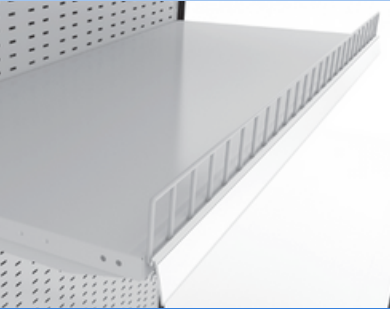


WIRE SHELF RISER




PLEXI SHELF RISER

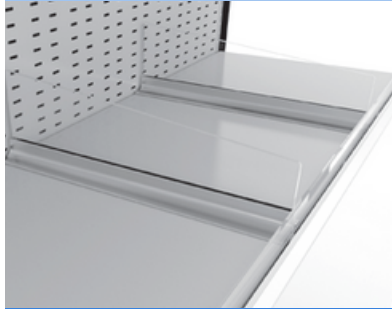


PLEXI PRODUCT DIVIDER

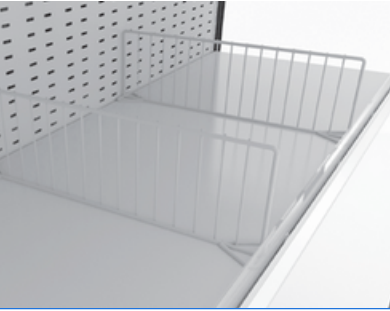


WIRE PRODUCT DIVIDER

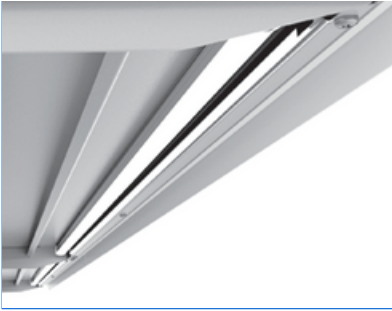


SHELF LIGHTING

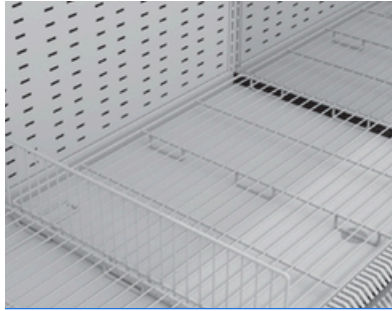

WIRE BASE TRAY
WIRE BASE PRODUCT DIVIDER

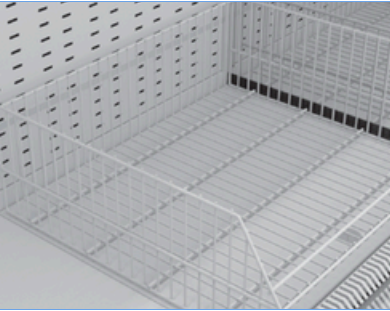


WIRE BASKET

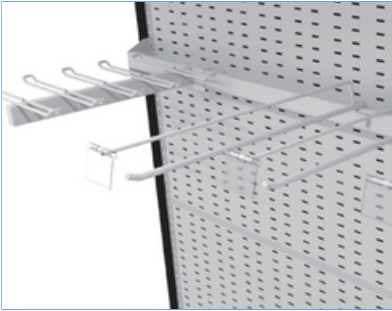


HOOK BAR




CABINET UPSTAND

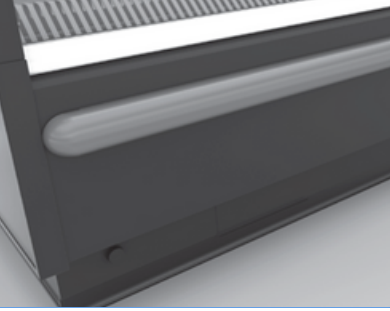

PLASTIC BUMPRAIL

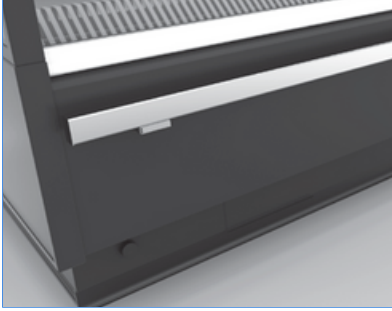


STAINLESS STEEL BUMPRAIL

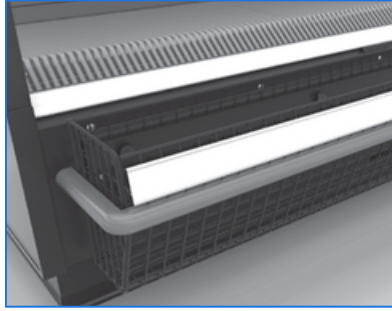

BASE FRONT CRISP BASKET



NIGHT BLIND

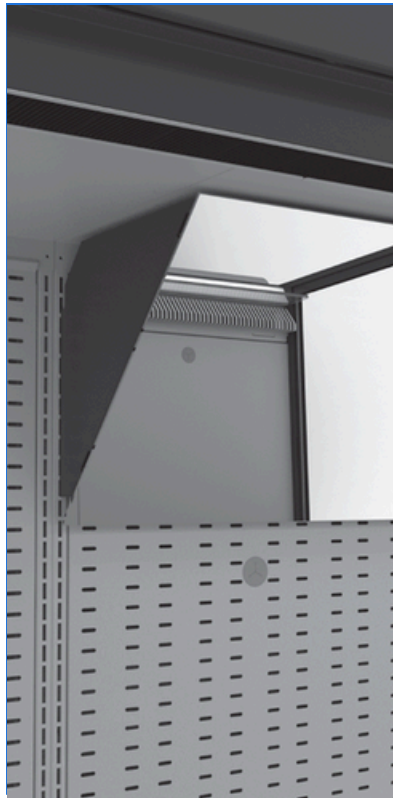

MIRROR (FV & MT)



ACRYLIC SYSTEM DIVIDE



PANAROMIC SIDE PANEL



INTERMEDIATE SIDE PANEL






MIRRORED SIDE PANEL

TECHNICAL DATA

HEIGHT 2050

DEPTH 950

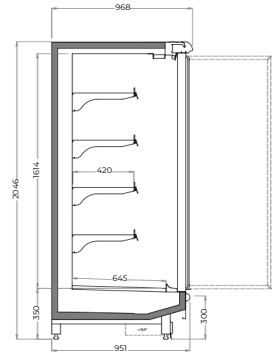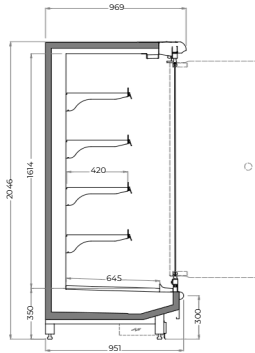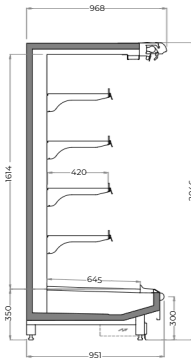

GLINT V3 2050 / 950

Length mm | 1250 | 1875 | 2500 | 3750
2812,5 | 3125 | 2136 (HC)




GLINT V3 2050 / 950

Length mm | 1250 | 1875 | 2500 | 3750
2812,5 | 3125 | 2136 (HC)

GLINT V3 2050 / 950

Length mm | 1250 | 1875 | 2500 | 3750
2812,5 | 3125 | 2136 (HC)

DEPTH 1020

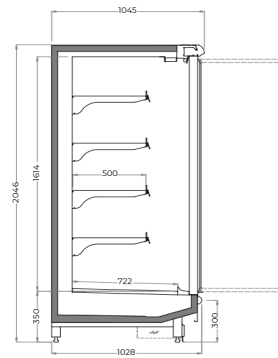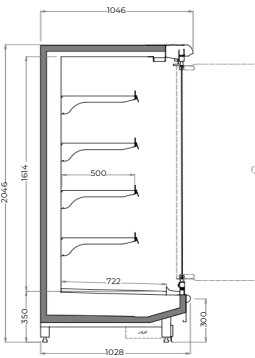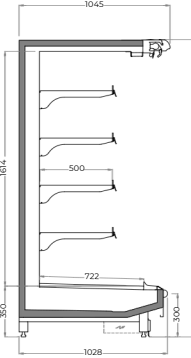

GLINT V3 2050 / 1020

Length mm | 1250 | 1875 | 2500 | 3750
2812,5 | 3125 | 2136 (HC)




GLINT V3 2050 / 1020

Length mm | 1250 | 1875 | 2500 | 3750
2812,5 | 3125 | 2136 (HC)

GLINT V3 2050 / 1020

Length mm | 1250 | 1875 | 2500 | 3750
2812,5 | 3125 | 2136 (HC)

DEPTH 1120

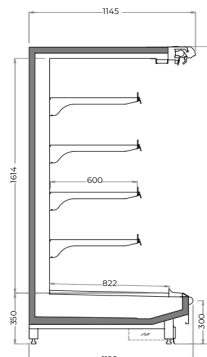

GLINT V3 2050 / 1120

Length mm | 1250 | 1875 | 2500 | 3750
2812,5 | 3125

GLINT V3 2050 / 1120




Length mm | 1250 | 1875 | 2500 | 3750
2812,5 | 3125

GLINT V3 2050 / 1120

Length mm | 1250 | 1875 | 2500 | 3750
2812,5 | 3125

HEIGHT 2200

DEPTH 950

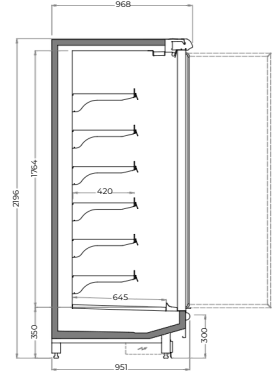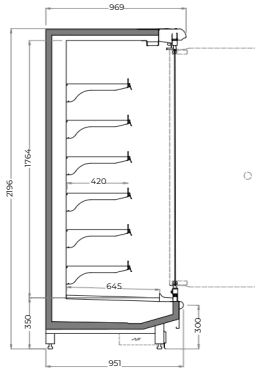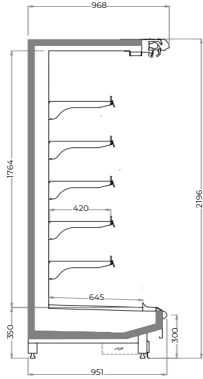

GLINT V3 2200 / 950

GLINT V3 2200 / 950




GLINT V3 2200 / 950

Length mm | 1250 | 1875 | 2500 | 3750
2812,5 | 3125 | 2136 (HC)

Length mm | 1250 | 1875 | 2500 | 3750
2812,5 | 3125 | 2136 (HC)

Length mm | 1250 | 1875 | 2500 | 3750
2812,5 | 3125 | 2136 (HC)

DEPTH 1020

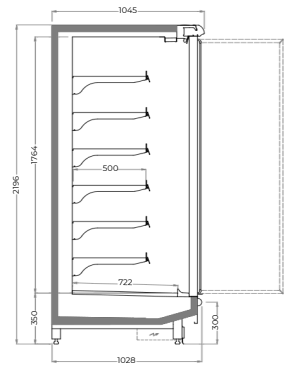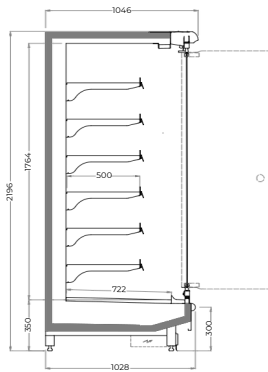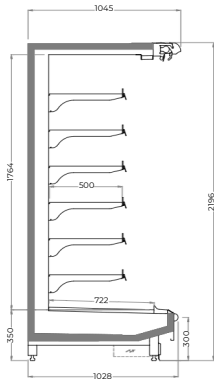

GLINT V3 2200 / 1020

GLINT V3 2200 / 1020




GLINT V3 2200 / 1020

Length mm | 1250 | 1875 | 2500 | 3750
2812,5 | 3125 | 2136 (HC)

Length mm | 1250 | 1875 | 2500 | 3750
2812,5 | 3125 | 2136 (HC)

Length mm | 1250 | 1875 | 2500 | 3750
2812,5 | 3125 | 2136 (HC)

DEPTH 1120

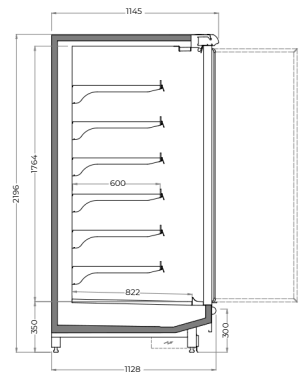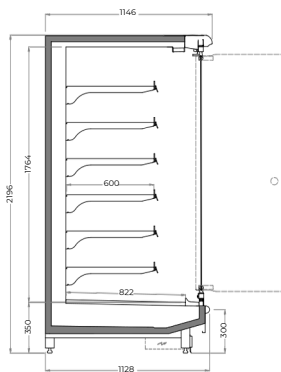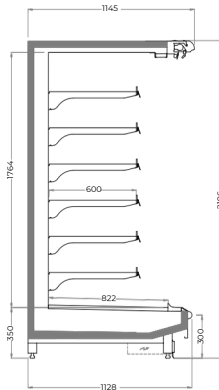

GLINT V3 2200 / 1120

GLINT V3 2200 / 1120


GLINT V3 2200 / 1120

Length mm | 1250 | 1875 | 2500 | 3750
2812,5 | 3125

Length mm | 1250 | 1875 | 2500 | 3750
2812,5 | 3125


Length mm | 1250 | 1875 | 2500 | 3750
2812,5 | 3125

TECHNICAL DATA

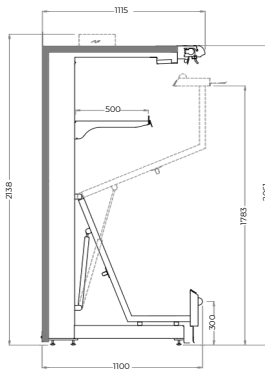

GLINT V3 2050 LIFT UP


Length mm | 1250 | 1875 | 2500 | 3750

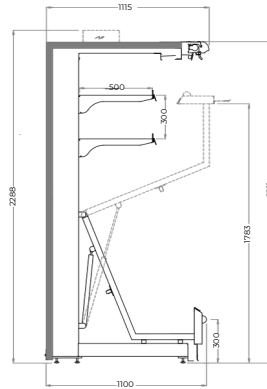


GLINT V3 2200 LIFT UP

Length mm | 1250 | 1875 | 2500 | 3750



ISLAND CONFIGURATION

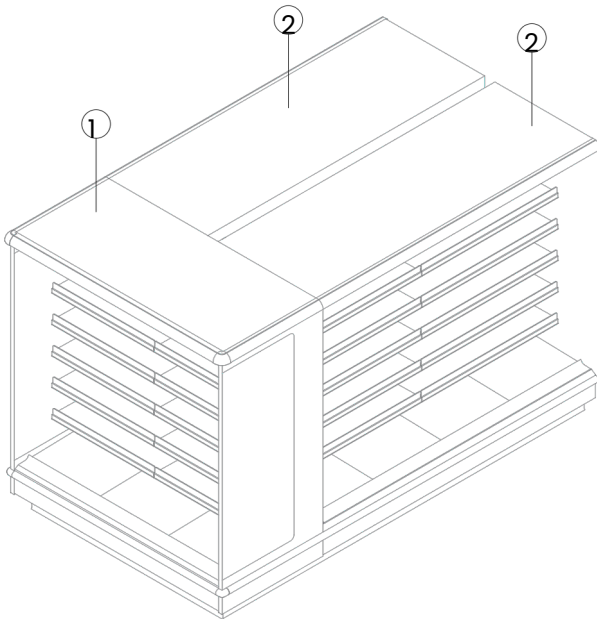



- ① END CASE
- ② RUN CASE

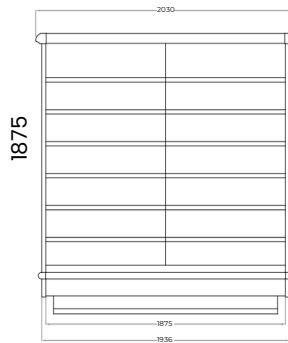


If Glint V3 950 run cabinets are positioned back to back

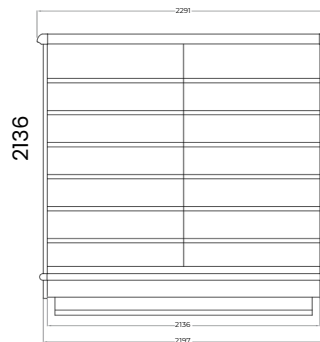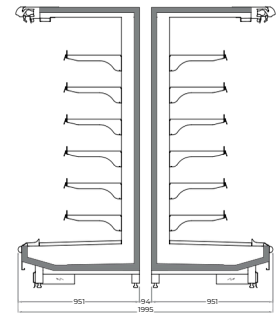


If Glint V3 950 / 1020 run cabinets are positioned back to back

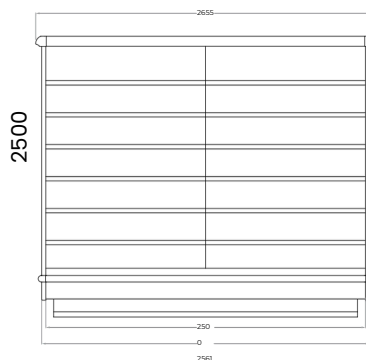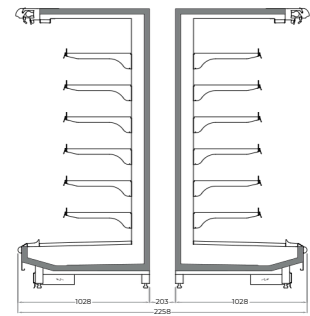

If Glint V3 1120 run cabinets are positioned back to back

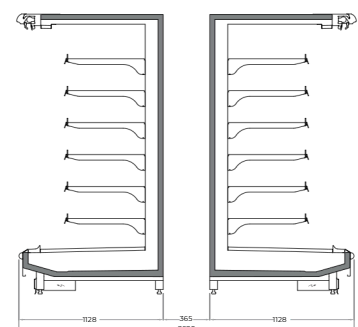

WHERE QUALITY MEETS RELIABILITY

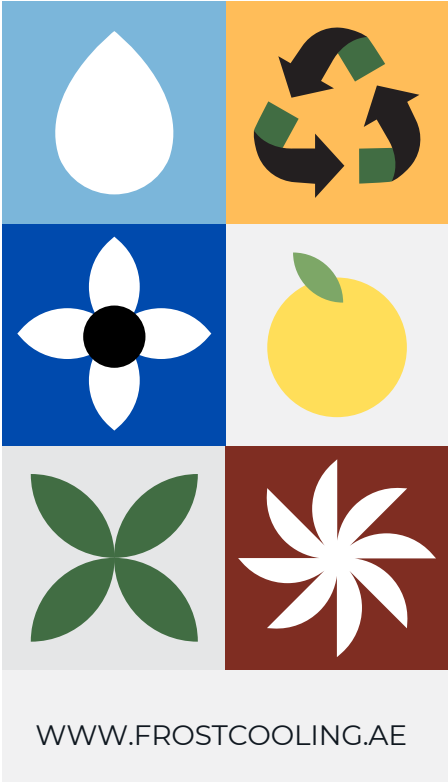

FROST COOLING TRADING
SALES: +971 58 553 8232
OFFICE: +971 58 520 5232
EMAIL: SALES@FROSTCOOLING.AE