



VECTO

VERTICAL MULTI-DECK





Benefits & Specifications:

- Stand out features for concept building
- Practical design for simple installation and maintenance
- Efficient in energy consumption with higher evaporation temperature
- Designed with safety in mind
- Ideal for wide variety of food presentations
- Designed for modular configurations
- Retrofit solutions for new energy efficiency requirements
- Low operating costs
- Available with double / single glazed hinged door and sliding glass door options

Dimensions (mm):

Height : 2050 / 2200

Length : Run Cabinets : 1250 / 1875 / 2500 / 2812,5 / 3125 / 3750


End Cabinets : 1660 / 1875 / 2136

Depth : 770 / 850 / 950 / 1090


SYSTEM	OPERATING TEMP. °C	REFRIGERANT
REMOTE	-2 / 0	HFC blend
	-1 / +1	HFC/HFO blend
	+2 / +4	CO ₂
	+4 / +6	GLYCOL/WATER

HFC: R407A / R407F / R134a / R404A • HFC/HFO: R448A / R449A / R452A / R450A
 CO₂: R744 • GLYCOL/WATER: R718


ACCESSORIES

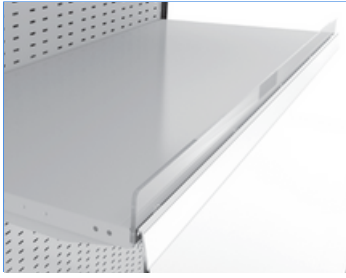


SOLID SHELF

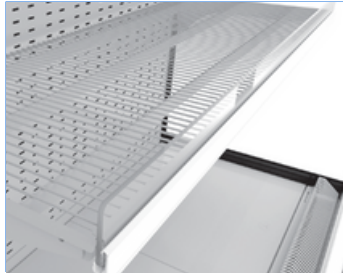

WIRE SHELF

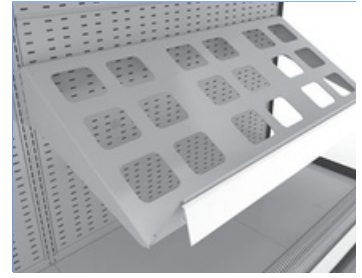


RACK SHELF

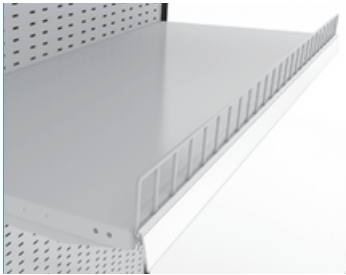


WIRE SHELF RISER




PLEXI SHELF RISER

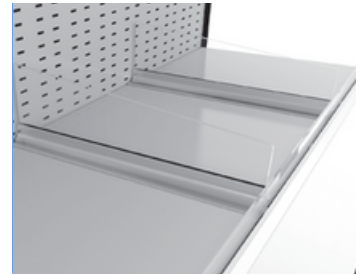


PLEXI PRODUCT DIVIDER

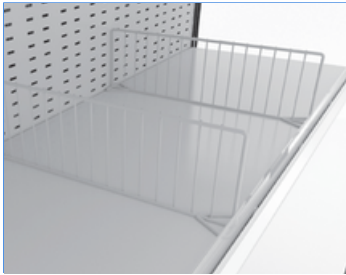


WIRE PRODUCT DIVIDER

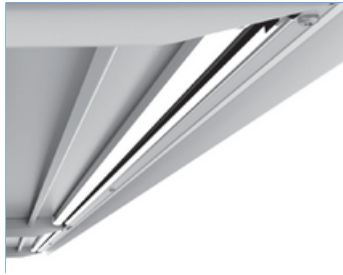


SHELF LIGHTING

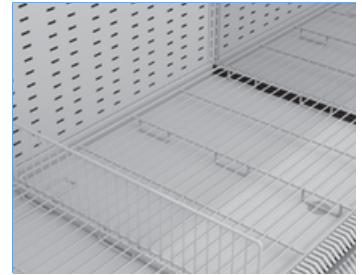

WIRE BASE TRAY
WIRE BASE PRODUCT DIVIDER

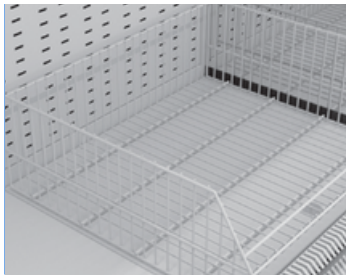


WIRE BASKET

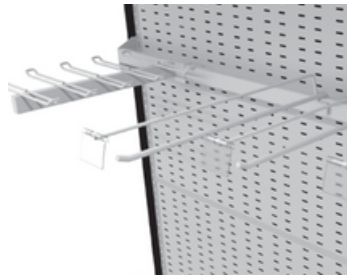


HOOK BAR




CABINET UPSTAND

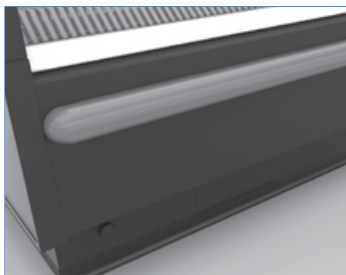

PLASTIC BUMPRAIL

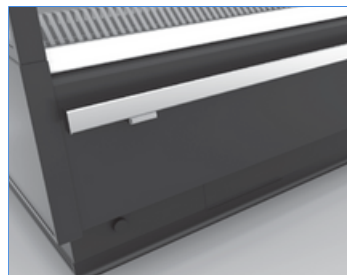

STAINLESS STEEL BUMPRAIL

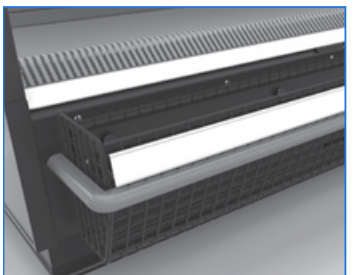

BASE FRONT CRISP BASKET



NIGHT BLIND



MIRROR (FV & MT)



ACRYLIC SYSTEM DIVIDE



PANAROMIC SIDE PANEL



INTERMEDIATE SIDE PANEL



MIRRORED SIDE PANEL

DOOR OPTIONS



SINGLE GLASS DOORS




DOUBLE GLAZED HINGED DOORS




DOUBLE GLAZED SLIDING DOORS

SHELF OPTIONS




H: 2050 mm

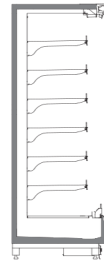


H: 2200 mm

DELICATESSEN




H: 2050 mm

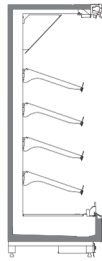


H: 2200 mm

PACKED MEAT




H: 2050 mm

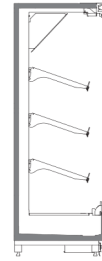

H: 2200 mm


FRUIT & VEGETABLE

HEIGHT 2200

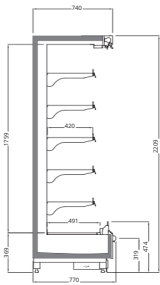


VECTO V3 2200 / 770

Length mm | 1250 | 1875 | 2500 | 2812,5 | 3125 | 3750 | 1660 (HC)

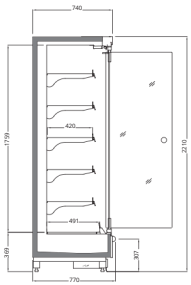


VECTO V3 2200 / 770
With Single Glass Doors

Length mm | 1250 | 1875 | 2500 | 2812,5 | 3125 | 3750 | 1660 (HC)

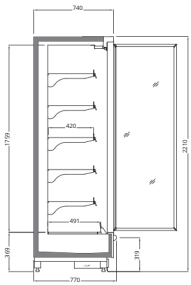


VECTO V3 2200 / 770
With Double Glass Doors

Length mm | 1250 | 1875 | 2500 | 2812,5 | 3125 | 3750 | 1660 (HC)

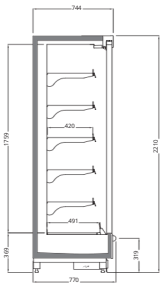


VECTO V3 2200 / 770
With Double Glass Sliding Doors

Length mm | 1250 | 1875 | 2500 | 2812,5 | 3125 | 3750 | 1660 (HC)

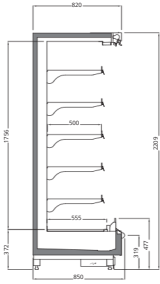


VECTO V3 2200 / 850

Length mm | 1250 | 1875 | 2500 | 2812,5 | 3125 | 3750 | 1660 (HC) | 1875 (HC)

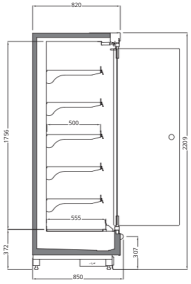


VECTO V3 2200 / 850
With Single Glass Doors

Length mm | 1250 | 1875 | 2500 | 2812,5 | 3125 | 3750 | 1660 (HC) | 1875 (HC)

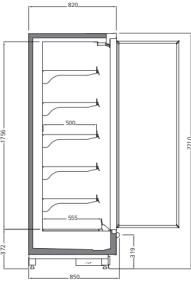


VECTO V3 2200 / 850
With Double Glass Doors

Length mm | 1250 | 1875 | 2500 | 2812,5 | 3125 | 3750 | 1660 (HC) | 1875 (HC)

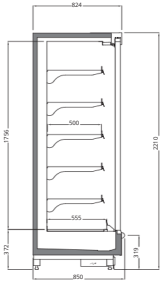


VECTO V3 2200 / 850
With Double Glass Sliding Doors

Length mm | 1250 | 1875 | 2500 | 2812,5 | 3125 | 3750 | 1660 (HC) | 1875 (HC)

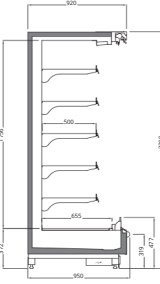


VECTO V3 2200 / 950

Length mm | 1250 | 1875 | 2500 | 2812,5 | 3125 | 3750 | 1660 (HC) | 1875 (HC)

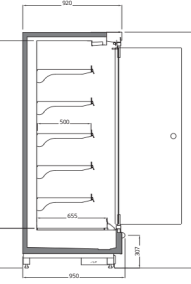


VECTO V3 2200 / 950
With Single Glass Doors

Length mm | 1250 | 1875 | 2500 | 2812,5 | 3125 | 3750 | 1660 (HC) | 1875 (HC)

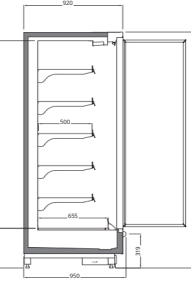


VECTO V3 2200 / 950
With Double Glass Doors

Length mm | 1250 | 1875 | 2500 | 2812,5 | 3125 | 3750 | 1660 (HC) | 1875 (HC)

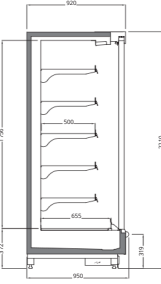


VECTO V3 2200 / 950
With Double Glass Sliding Doors

Length mm | 1250 | 1875 | 2500 | 2812,5 | 3125 | 3750 | 1660 (HC) | 1875 (HC)

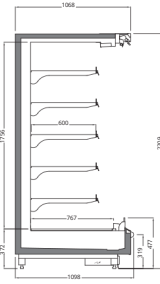


VECTO V3 2200 / 1090

Length mm | 1250 | 1875 | 2500 | 2812,5 | 3125 | 3750 | 2136 (HC)

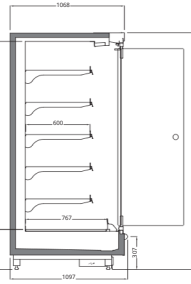


VECTO V3 2200 / 1090
With Single Glass Doors

Length mm | 1250 | 1875 | 2500 | 2812,5 | 3125 | 3750 | 2136 (HC)

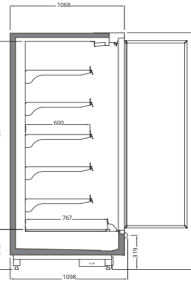

VECTO V3 2200 / 1090
With Double Glass Doors


Length mm | 1250 | 1875 | 2500 | 2812,5 | 3125 | 3750 | 2136 (HC)

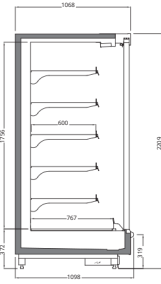

VECTO V3 2200 / 1090
With Double Glass Sliding Doors


Length mm | 1250 | 1875 | 2500 | 2812,5 | 3125 | 3750 | 2136 (HC)

TECHNICAL DATA

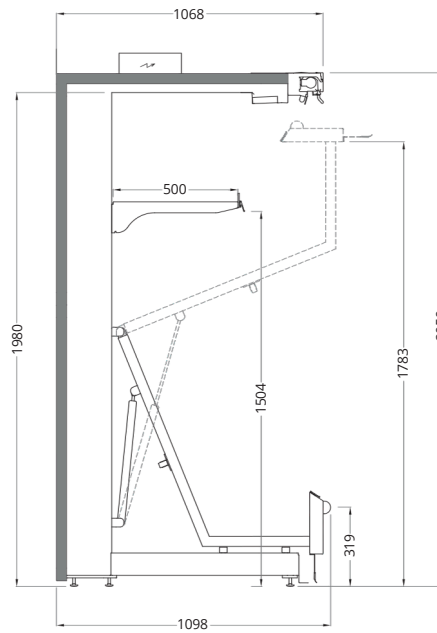

VECTO V3 2050 LIFT UP


Length mm | 1250 | 1875 | 2500 | 3750

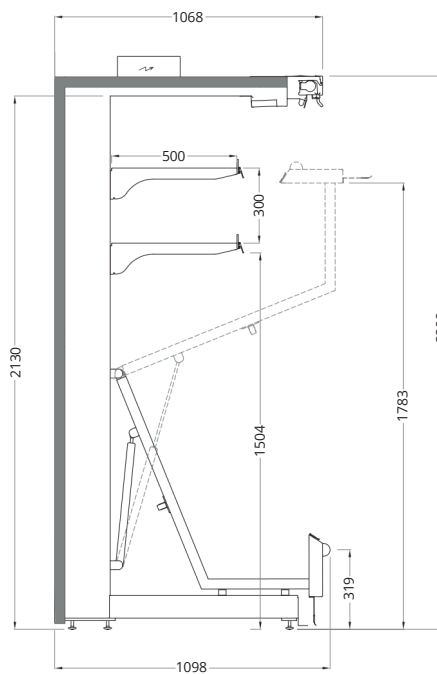


VECTO V3 2200 LIFT UP

Length mm | 1250 | 1875 | 2500 | 3750


ISLAND CONFIGURATION

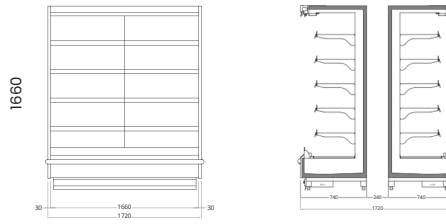

If Vecto V3 770 run cabinets are positioned back to back

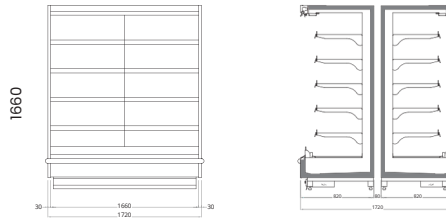


If Vecto V3 850 and Pearl V3 1020 run cabinets are positioned back to back

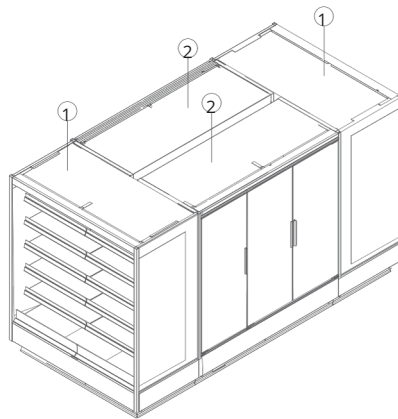


① END CASE

② RUN CASE

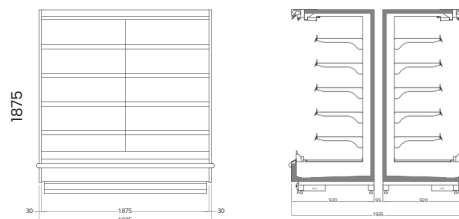


If Vecto V3 950 run cabinets are positioned back to back

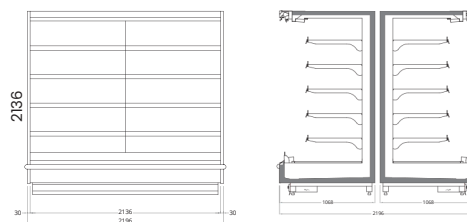

If Vecto V3 1090 run cabinets are positioned back to back

WHERE QUALITY MEETS RELIABILITY

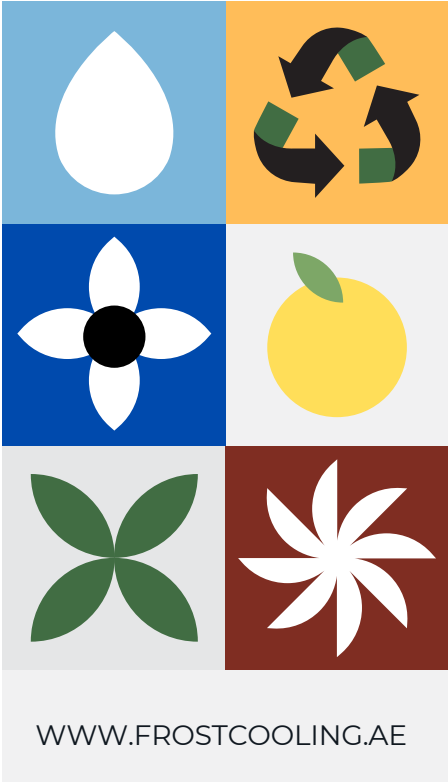

FROST COOLING TRADING
SALES: +971 58 553 8232
OFFICE: +971 58 520 5232
EMAIL: SALES@FROSTCOOLING.AE